



Tank Bag User Manual

Model: BTB10BK



Please read the user manual and related after-sales service terms before use. Incorrect installation and usage may damage the product, significantly impact vehicle safety, and result in the loss of applicable warranty services.



Scan QR code to watch the installation video

Parameter

Model: BTB10BK



Capacity: Unexpanded 4.5L/Expanded 6.5L

Appearance size: Length160mm/6.30in * Width260mm/10.24in *



Height120mm/4.72in

Material: nylon, polyurethane


Accessories List

Serial Number	Name	Diagram	Quantities	Notes
①	Tank Bag		1 piece	
②	Rain Cover		1 piece	

Product Details


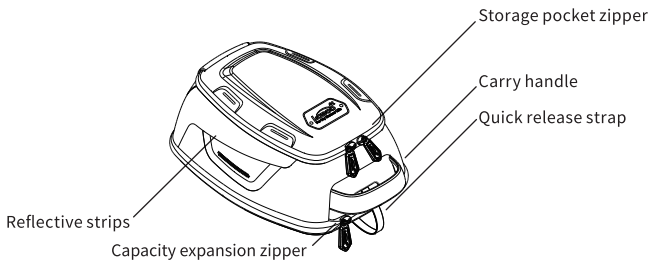


Charging cable/rain cover fixation strap channel

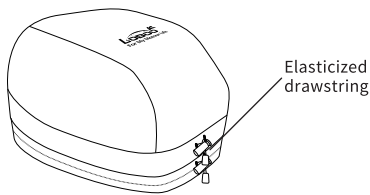


Rain Cover


1. With the rain cover facing upwards, insert the rain cover fixation strap buckle through the rain cover fixation strap channel, connecting it with the quick-release buckle inside the bag.



2. Cover the tank bag with the rain cover and tighten the elastic drawstrings.




Unexpanded




Expanded

Tank Bag Base

1. Adjustment method: Pull up the securing buckle, push the magnetic base forward or backward to adjust to the right position, then press the fixed buckle to fasten it.

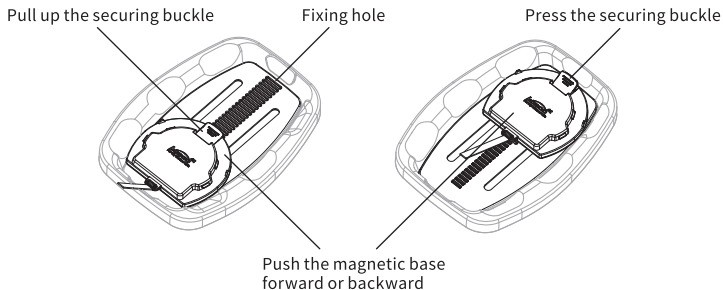


2. The quick-release tank bag base of the tank bag can be adjusted forward and backward, with an adjustment range of 110mm between the front and rear fixing holes. After adjusting it to the desired position, tighten the quick-release strap to the appropriate location.




Tank Bag


1. Install the tank bag ring onto the motorcycle fuel tank cap. For the installation method, see the instructions for the motorcycle universal tank bag ring. (Different models have different installation methods of the tank bag ring)




2. Secure the tank bag onto the tank bag ring with the quick release base, and ensure that it is properly aligned.



3. After the tank bag is installed, make sure to check the normal steering of the motorcycle handlebar. If the steering is affected by the tank bag, please refer to the manual, and remove the tank bag to re-adjust the quick-release base to a more suitable position.



4. Pull the quick-release base strap to remove the tank bag.




Precautions for Use

1. Please check if the product is properly installed on the motorcycle tank before riding to avoid the product falling off during the ride and causing property damage.
2. Please use a damp towel or soft bristle brush tool to clean it (do not use bleach, fabric softener, or other acidic or alkaline cleaners). Do not machine wash, iron, dry clean, or use any form of heat to dry the product. Let it air dry naturally and do not expose it to direct sunlight for an extended period of time.
3. When not in use for a long time, store the product in a dry, cool environment to prevent mold damage and periodically clean the surface to remove dust and dirt and extend its service life.
4. Check the product functionality before using. Do not use insecticides on the product surface when using it in harsh outdoor environments. Please avoid using sharp objects to scratch the product fabric during use, which may affect its performance.


Reversing Installation Instructions for Tank Bag Base

1. Use a Phillips screwdriver to remove the six cross tapping screws and nuts on the inner liner of the tank bag.

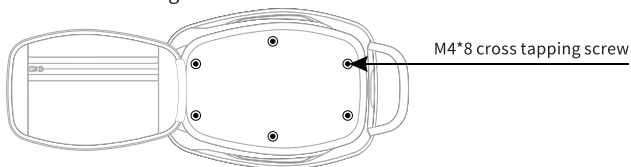


Note: The replacement of the quick release base is based on the needs of the model, if you don't need it, please ignore this page!

2. Switch the quick-release base's head and tail.

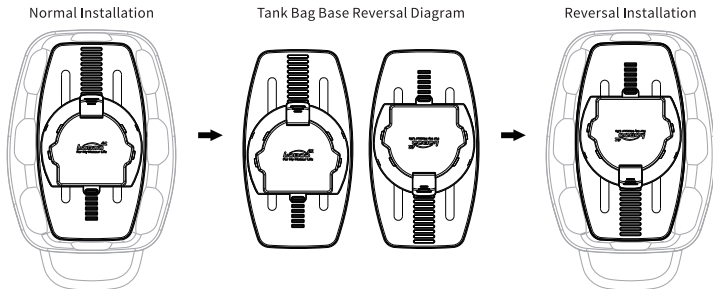

3. Six fixed points on the reverse side of the bag base, align the six holes at the bottom of the tank bag, use the cross self-tapping screws and nuts at the inner liner of the tank bag to install the bag base back on the tank bag.



Warranty Card



Please read this after-sales service guarantee card carefully. If you cannot accept it, please contact the dealer for return and exchange in time. Installation and use means acceptance of this after-sales service term.

After-sales Service Terms

1. One-year free warranty period, this product can enjoy free repair service within one year from the date of sale if there are quality problems under normal circumstances.
2. Limited warranty: After the one-year warranty period expires, LOBOO will provide paid warranty service, the cost is based on the actual replacement material cost, and no labor cost is charged separately.

Free warranty service does not include the following

1. No warranty card or cannot provide valid purchase proof.
2. Improper installation, use, man-made or accidental damage, self-disassembly, self-modification and repair, etc.

Return and Exchange Information

Platform ID: _____ Order Number: _____

Contact Name: _____ Contact Phone: _____

Return Address: _____

Description

Please keep this card properly and send it back with the product (copy is valid)